

GLOBAL STANDARD PACK

KEY FEATURES


- Numbered RMU spaces on Standard Rack are printed on the equipment mounting channels providing the installer an easy way of positioning equipment in planned spaces.
- Cable openings in Global Vertical Cabling Section align with RMU spaces on the rack allowing cables to exit by RMU.
- Cable openings have rounded edges to protect cable and will not deform or break.
- Cover snaps on and opens to the right or left for easy access to cables during moves, adds or changes.

APPLICATIONS

- Use Global Standard in small to medium size facilities in Telecommunications Rooms (TR) and Equipment Rooms (ER) to support the Main Cross-Connect (MC), Intermediate Cross-Connect (IC) or Horizontal Cross-Connect (HC) and voice and network switching equipment.
- Global Standard is a cable management system that provides physical protection and pathway support for premise cable and patch cords while promoting loose bundling of cables.

RELATED ACCESSORIES

- Standard Racks
- Global Vertical Cabling Sections
- Universal Horizontal Cable Managers
- Double-Sided Universal Horizontal Cable Managers
- Fiber Management Spools
- Cable Runway Radius Drops
- Saf-T-Grip® Reusable Cable Management Straps

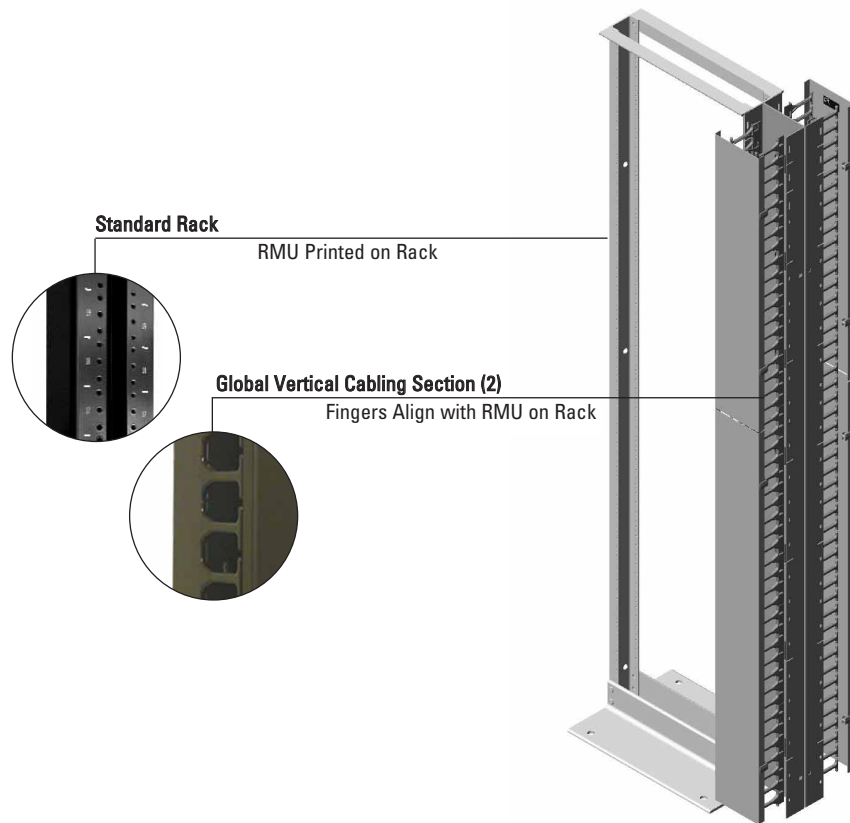

The Global Standard is an easy to use solution for managing equipment and cabling at the cross connect. It includes one CPI Standard Rack, a concrete floor installation kit, and one or two CPI Global Vertical Cabling Sections packaged in a single carton.

Standard Rack will support patch panels, fiber enclosures and network switches, is UL Listed as a communications circuit accessory to meet code requirements, and is easy to set up and use. Global Vertical Cabling Section is a single-sided cable management trough that controls cable feed with a patented system of large cable openings that align with each equipment-mounting space (RMU) on the rack. The snap-on cover provides easy access to cables and a clean, finished look for a complete cable management system.

The Global Standard shown above has two Global Vertical Cabling Sections used back-to-back on the same side of the rack to create a double-sided cable manager. Cabling Sections can also be used on opposite sides of the rack.



SPECIFICATIONS

Standard Rack

- UL Listed, UL 1863
- 750 lb capacity
- 19" wide two-post rack
- EIA-310-D compliant
- 45 rack-mount spaces
- Universal hole spacing (5/8"-5/8"-1/2")
- Threaded, front and rear, #12-24

- **Footprint:**
20.31"W x 15"D

- **Height:**
7' (84")

- **Material:**
6061-T6 aluminum extrusion

- **Finish:**
Grained aluminum or painted black

- **Weight:**
32 lb

Global Vertical Cabling Section

- Single-sided trough
- Snap on, 2 piece cover
- 1 RMU high cable openings
- Available in two widths

Cable capacities (40% fill):

Width	Cat 5e	Cat 6
3.65"	191	122
6.00"	334	214

- **Footprints:**
3.65"W x 6.76"D
6.00"W x 6.76"D


- **Height:**
7' (84")

- **Materials:**
5052-H32 aluminum sheet
UL 94V-O Flame Resistant composite

- **Finish:**
Grained aluminum or painted black
Fingers and covers are black only

- **Weight:**
3.65"W - 16 lb
6.00"W - 19 lb

DIMENSIONS

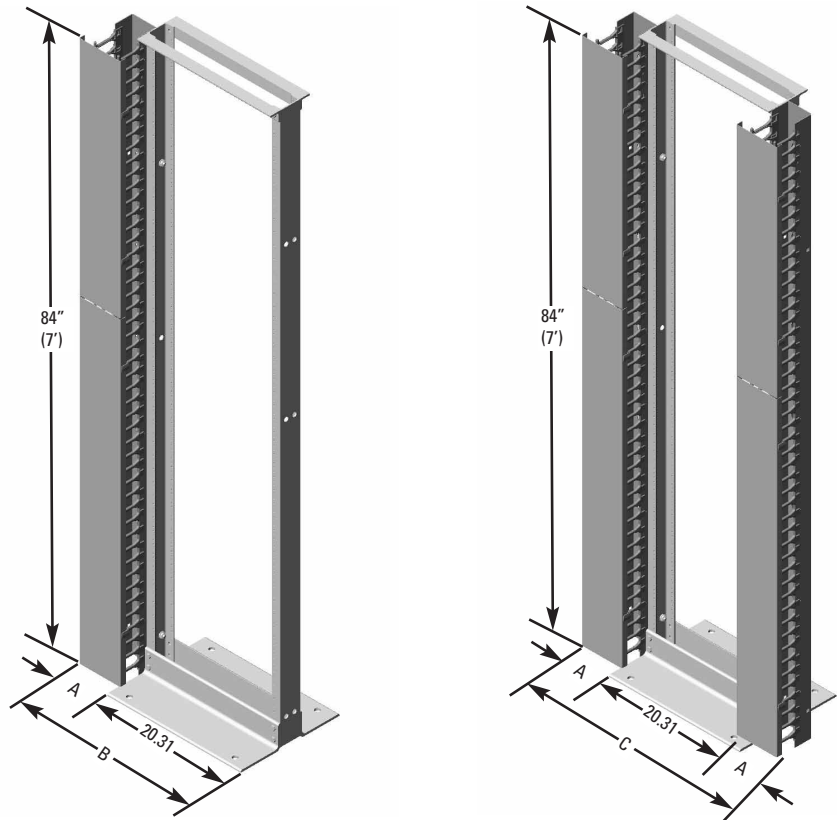

Part Number	QTY GVCS		Dimensions		
	3.65"W	6.00"W	A	B	C
57001-X03	1	-	3.65	23.96	-
57002-X03	2	-	3.65	23.96	27.61
57003-X03	-	1	6.00	26.31	-
57004-X03	-	2	6.00	26.31	32.31

ORDERING INFORMATION

The Global Standard Pack					
Part Number	Description			Color	Shipping Weight
	Standard Rack	3.65" W GVCS	6.00" W GVCS		
57001-503	1	1	-	Clear	50 lb
57001-703	1	1	-	Black	50 lb
57002-503	1	2	-	Clear	65 lb
57002-703	1	2	-	Black	65 lb
57003-503	1	-	1	Clear	52 lb
57003-703	1	-	1	Black	52 lb
57004-503	1	-	2	Clear	67 lb
57004-703	1	-	2	Black	67 lb

